







## Fiche Technique




### Plots Cylindriques

Matière : caoutchouc naturel

| D<br>(mm) | H<br>(mm) | Filetage<br>d | h<br>(mm) | t<br>(mm) | b<br>(mm) | A | B | C | D |
|-----------|-----------|---------------|-----------|-----------|-----------|---|---|---|---|
| 13        | 10        | M5            | 10        |           | 1,5       | X |   |   | X |
| 13        | 13,5      | M5            | 10        |           | 1,5       |   |   |   | X |
| 13        | 15        | M5            | 10        |           | 1,5       | X |   |   | X |
| 13        | 20        | M5            | 10        |           | 1,5       | X |   |   | X |
| 16        | 10        | M5            | 12        | 3         | 2         | X | X | X | X |
| 16        | 15        | M5            | 12        | 3         | 2         | X | X | X | X |
| 16        | 20        | M5            | 12        | 3         | 2         | X | X | X | X |
| 16        | 25        | M5            | 12        | 3         | 2         | X | X | X | X |
| 20        | 8,5       | M6            | 16,5      |           | 2         | X |   |   | X |
| 20        | 15        | M6            | 16,5      | 4         | 2         | X | X | X | X |
| 20        | 20        | M6            | 16,5      | 4         | 2         | X | X | X | X |
| 20        | 25        | M6            | 16,5      | 4         | 2         | X | X | X | X |
| 20        | 30        | M6            | 16,5      | 4         | 2         | X | X | X | X |
| 25        | 10        | M8            | 20        |           | 2         | X |   |   | X |
| 25        | 15        | M8            | 20        |           | 2         | X |   |   | X |
| 25        | 19        | M8            | 20        |           | 2         |   |   |   | X |
| 25        | 22        | M8            | 20        | 6         | 2         | X | X | X | X |
| 25        | 25        | M8            | 20        | 6         | 2         | X | X | X | X |
| 25        | 30        | M8            | 20        | 6         | 2         | X | X | X | X |
| 25        | 40        | M8            | 20        | 6         | 2         | X | X | X | X |
| 30        | 15        | M8            | 25        | 6         | 2         | X | X |   | X |
| 30        | 22        | M8            | 25        | 6         | 2         | X | X | X | X |
| 30        | 30        | M8            | 25        | 6         | 2         | X | X | X | X |
| 30        | 40        | M8            | 25        | 6         | 2         | X | X | X | X |
| 40        | 20        | M10           | 25        | 8         | 2         | X | X |   | X |
| 40        | 25        | M10           | 25        |           | 2         |   |   |   | X |
| 40        | 28        | M10           | 25        | 8         | 2         | X | X | X |   |
| 40        | 35        | M10           | 25        | 8         | 2         | X | X | X | X |
| 40        | 40        | M10           | 25        | 8         | 2         | X | X | X | X |
| 40        | 45        | M10           | 25        | 8         | 2         | X | X | X | X |
| 50        | 25        | M10           | 25        |           | 2,5       | X |   |   | X |
| 50        | 35        | M10           | 25        | 8         | 2,5       | X | X | X | X |
| 50        | 45        | M10           | 25        | 8         | 2,5       | X | X | X | X |
| 60        | 22        | M10           | 25        |           | 2,5       |   |   |   | X |
| 60        | 25        | M10           | 25        |           | 2,5       | X |   |   | X |
| 60        | 36        | M10           | 25        | 8         | 2,5       | X | X | X | X |
| 60        | 45        | M10           | 25        | 8         | 2,5       | X | X | X | X |
| 70        | 35        | M10           | 25        | 9         | 3         | X | X | X | X |
| 70        | 50        | M10           | 25        | 9         | 3         | X | X | X | X |
| 70        | 70        | M10           | 25        | 9         | 3         | X | X | X | X |
| 80        | 25        | M10           | 45        |           | 3         |   |   |   | X |
| 80        | 30        | M14           | 35        |           | 3         | X |   |   | X |
| 80        | 40        | M14           | 35        | 12        | 3         | X | X | X | X |
| 80        | 70        | M14           | 35        | 12        | 3         | X | X | X | X |
| 80        | 80        | M14           | 35        | 12        | 3         | X | X | X | X |
| 100       | 40        | M16           | 47        | 14        | 3         | X | X | X |   |
| 100       | 55        | M16           | 47        | 14        | 3         | X | X | X |   |
| 100       | 60        | M16           |           | 14        | 3         |   |   | X |   |
| 100       | 75        | M16           |           | 14        | 3         |   |   | X |   |
| 100       | 80        | M16           | 47        | 14        | 3         | X | X | X |   |
| 100       | 100       | M16           | 47        | 14        | 3         |   | X | X |   |



## Plot AC

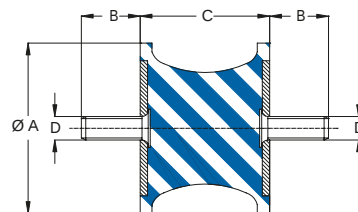


Matière : caoutchouc naturel

| Référence | A<br>(mm) | B<br>(mm) | D   | C<br>(mm) | Dureté<br>Shore A | Compression    |                          | Cisaillement   |                          |
|-----------|-----------|-----------|-----|-----------|-------------------|----------------|--------------------------|----------------|--------------------------|
|           |           |           |     |           |                   | Charge<br>maxi | Déflexion<br>(mm)<br>daN | Charge<br>maxi | Déflexion<br>(mm)<br>daN |
| AC 2019   | 20        | 19        | M 6 | 15        | 50                | 12             | 4                        | 2              | 4                        |
| AC 4028   | 40        | 28        | M10 | 25        | 50                | 40             | 5,5                      | 7              | 5,5                      |
| AC 5744   | 57        | 44        | M 8 | 20        | 50                | 40             | 5                        | 10             | 8,5                      |
| AC 5745   | 57        | 44        | M 8 | 20        | 50                | 75             | 5                        | 25             | 8,5                      |
| AC 6060   | 60        | 60        | M10 | 25        | 60                | 150            | 8                        | 20             | 12                       |
| AC 8070   | 80        | 70        | M14 | 35        | 60                | 300            | 9,5                      | 65             | 14                       |
| AC 9576   | 95        | 76        | M16 | 42        | 60                | 400            | 9,5                      | 75             | 15                       |
| AC 10875  | 108       | 75        | M16 | 45        | 50                | 600            | 15                       | 140            | 15                       |
| AC 13085  | 130       | 85        | M16 | 45        | 50                | 900            | 17                       | 185            | 17                       |


## Plot DC

Matière : caoutchouc naturel


| Référence | A<br>(mm) | B<br>(mm) | D   | C<br>(mm) | Dureté<br>Shore A | Compression           |                   |
|-----------|-----------|-----------|-----|-----------|-------------------|-----------------------|-------------------|
|           |           |           |     |           |                   | Charge<br>maxi<br>daN | Déflexion<br>(mm) |
| DC 5742   | 57        | 42        | M8  | 20        | 50                | 40                    | 5                 |
| DC 5743   | 57        | 42        | M8  | 20        | 50                | 75                    | 5                 |
| DC 6057   | 60        | 57        | M10 | 25        | 60                | 150                   | 8                 |
| DC 8065   | 80        | 65        | M14 | 35        | 60                | 300                   | 9,5               |
| DC 9570   | 95        | 70        | M16 | 42        | 60                | 400                   | 9,5               |

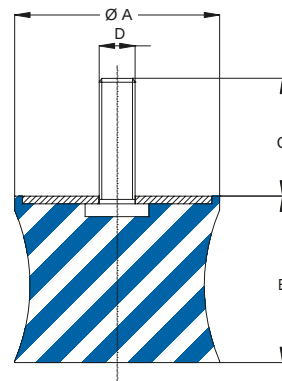


Type 1



Type 2



Type 3





## Butée DP

Matière : caoutchouc naturel

| Référence | Type | A<br>(mm) | B<br>(mm) | D    | C<br>(mm) | Dureté<br>Shore A | Compression    |                          | Chocs        |                   |
|-----------|------|-----------|-----------|------|-----------|-------------------|----------------|--------------------------|--------------|-------------------|
|           |      |           |           |      |           |                   | Charge<br>maxi | Déflexion<br>(mm)<br>daN | Chocs<br>daN | Déflexion<br>(mm) |
| DP 2519   | 2    | 25        | 20        | M 8  | 20        | 60                | 40             | 4                        | 100          | 8                 |
| DP 3030   | 2    | 30        | 30        | M 6  | 15        | 60                | 50             | 6                        | 140          | 12                |
| DP 5050   | 1    | 50        | 50        | M 8  | 20        | 60                | 90             | 10                       | 335          | 20                |
| DP 5058   | 1    | 50        | 58        | M 8  | 20        | 60                | 90             | 12                       | 370          | 23                |
| DP 5064   | 1    | 50        | 65        | M 8  | 20        | 60                | 90             | 13                       | 370          | 26                |
| DP 7060   | 1    | 70        | 60        | M12  | 30        | 60                | 160            | 12                       | 550          | 24                |
| DP 9580   | 1    | 95        | 80        | M16  | 42        | 60                | 350            | 16                       | 1100         | 32                |
| DP 12075  | 3    | 120       | 75        | M 16 | 45        | 75                | 2000           | 15                       | 4500         | 30                |
| DP 22060  | 3    | 220       | 136       | M 24 | 80        | 60                | 3800           | 27                       | 10000        | 54                |

# Equi-support EST



**Matière : caoutchouc naturel**

**Compression**

| Référence | A<br>(mm) | E<br>(mm) | M   | H<br>(mm) | B<br>(mm) | C<br>(mm) | F<br>(mm) | e<br>(mm) | Dureté<br>Shore A | Charge<br>maxi<br>daN | Déflexion<br>(mm) |
|-----------|-----------|-----------|-----|-----------|-----------|-----------|-----------|-----------|-------------------|-----------------------|-------------------|
| EST 4045  | 40        | 20        | M6  | 18        | 52        | 64        | 6,2       | 2         | 45                | 5                     | 2                 |
| EST 4060  | 40        | 20        | M6  | 18        | 52        | 64        | 6,2       | 2         | 60                | 10                    | 2                 |
| EST 6045  | 60        | 24        | M6  | 22        | 76        | 90        | 6,2       | 2         | 45                | 15                    | 3                 |
| EST 6060  | 60        | 24        | M6  | 22        | 76        | 90        | 6,2       | 2         | 60                | 25                    | 3                 |
| EST 6075  | 60        | 24        | M6  | 22        | 76        | 90        | 6,2       | 2         | 75                | 50                    | 3                 |
| EST 8045  | 80        | 27        | M8  | 25        | 100       | 120       | 8,2       | 2         | 45                | 40                    | 4                 |
| EST 8060  | 80        | 27        | M8  | 25        | 100       | 120       | 8,2       | 2         | 60                | 80                    | 4                 |
| EST 8075  | 80        | 27        | M8  | 25        | 100       | 120       | 8,2       | 2         | 75                | 120                   | 4                 |
| EST 10045 | 100       | 28        | M10 | 25        | 124       | 148       | 10,2      | 2,5       | 45                | 75                    | 4                 |
| EST 10060 | 100       | 28        | M10 | 25        | 124       | 148       | 10,2      | 2,5       | 60                | 160                   | 4                 |
| EST 10075 | 100       | 28        | M10 | 25        | 124       | 148       | 10,2      | 2,5       | 75                | 220                   | 4                 |
| EST 15045 | 150       | 40        | M14 | 35        | 182       | 214       | 12,2      | 4         | 45                | 130                   | 6,5               |
| EST 15060 | 150       | 40        | M14 | 35        | 182       | 214       | 12,2      | 4         | 60                | 300                   | 6,5               |
| EST 15075 | 150       | 40        | M14 | 35        | 182       | 214       | 12,2      | 4         | 75                | 400                   | 6,5               |
| EST 20045 | 200       | 44        | M18 | 40        | 240       | 280       | 15        | 5         | 45                | 500                   | 7,5               |
| EST 20060 | 200       | 44        | M18 | 40        | 240       | 280       | 15        | 5         | 60                | 850                   | 7,5               |
| EST 20075 | 200       | 44        | M18 | 40        | 240       | 280       | 15        | 5         | 75                | 1300                  | 7,5               |

Les 2 derniers chiffres de la référence indiquent la dureté shore du mélange naturel



**FIMIC SAS**

4, rue des Nonnetiers

Actipôle de Metz-Borny 57070 METZ

Tél : 03.87.76.32.32 Fax : 03.87.76.99.76

Email : [fimic@fimic.com](mailto:fimic@fimic.com) <http://www.fimic.com>